

High current permanent discharges in air induced by femtosecond laser filamentation

A. Houard, C. D'Amico, Y. Liu, Y. B. Andre, M. Franco, B. Prade, and A. Mysyrowicz^{a)}
*Laboratoire d'Optique Appliquée, ENSTA, Ecole Polytechnique, CNRS UMR 7639, 91761
 Palaiseau, France*

E. Salmon
LASIM, Université Lyon 1, CNRS UMR 5579, 69622 Villeurbanne, France

P. Pierlot and L.-M. Cleon
Agence d'Essai Ferroviaire, SNCF, 21 Av. du Président Allende, 94407 Vitry-sur-Seine, France

(Received 19 February 2007; accepted 4 April 2007; published online 27 April 2007)

Filaments created in air by an intense femtosecond laser pulse in the presence of an electric field generate a highly conductive permanent plasma column. © 2007 American Institute of Physics.

[DOI: [10.1063/1.2734396](https://doi.org/10.1063/1.2734396)]

There is currently a wide interest in the process of femtosecond laser filamentation in air (for a recent review see Ref. 1). During its propagation in air, an intense short IR laser pulse first undergoes self-focusing, because of the optical Kerr effect, until the peak intensity on axis becomes high enough ($\sim 5 \times 10^{13}$ W/cm²) to ionize air molecules. The ionization process involves the simultaneous absorption of eight to ten infrared photons. It has therefore a threshold-like behavior and a strong clamping effect on the intensity in the self-guided pulse. A dynamical competition then starts taking place between the self-focusing effect due to the optical Kerr effect and the defocusing effect due to the created plasma. As a result, the pulse maintains a small beam diameter and high peak intensity over large distances. In the wake of the self-guided pulse, a plasma column is created with an initial density of 10^{16} – 10^{17} e/cm³ over a distance which depends on initial laser conditions. This length is typically 1 m for a pulse initial power close to the minimum value P_{cr} required for filamentation (5 GW for an IR pulse at 800 nm under normal air conditions) and can reach hundreds of meters at higher powers.

It has been demonstrated that this plasma column is able to trigger and guide high voltage electric discharges between two electrodes in contact with the plasma column.^{2,3} Remarkably, there is a noticeable delay between the arrival of the laser pulse and the initiation of the discharge. A model has been developed which reproduces quantitatively this delayed initiation of the discharge in laboratory experiments.² In short, the short-lived plasma leads, in the presence of an electric field, to Joule heating of a thin air column. After plasma recombination, the expansion of the heated air column leads to a central depression canal, which initiates and guides the electric discharge. Up to 4 m long electric discharges have been produced with megavolt applied voltage.^{4–6} Although many features of these long discharges were similar to those carried on a centimeter scale in the laboratory, and therefore point out to a similar thermally driven discharge initiation, the more complex boundary conditions of the experiment prevented meaningful simulations to test the model.

There are many potential applications of filament-triggered discharges (laser lightning rod, fast switch for high voltage connection, etc.). In this letter, we address another potential application, namely, the contactless capture of current. A crucial requirement for such an application is the resistivity of the produced plasma, which must remain low in order to minimize unwanted power dissipation. Other important questions concern the amount of current such a discharge is able to carry, and the plasma lifetime, which should be long enough so that the plasma column is sustained between successive laser shots even at a low repetition rate. In order to address these questions, experiments have been performed using the Teramobile laser in conjunction with electric power facility designed to test the motors of high-speed trains (TGV).

The Teramobile laser is a mobile chirp pulse amplification laser system based on titanium:sapphire technology delivering pulses of 100 fs duration, with a peak power of several terawatts and a repetition rate of 10 Hz.⁷ The laser beam was focused in air with a telescope of 25 m focal length. This led to the formation of a bundle of about 40 plasma filaments over a distance of ~ 5 m. Two electrodes consisting of cylindrical copper blocks of 3 cm diameter were placed 2 m beyond the beginning of the filaments. At this point the diameter of the filament bundle was ~ 7 mm. It crossed through a 5 mm diameter hole pierced in the first electrode and impinged on the second electrode. The distance between the two electrodes could be varied between 3 and 60 mm. In some experiments, both electrodes were pierced, letting the filament bundle through, with no significant change in the results. The electric voltage applied across the electrodes was either dc voltage of 4 kV or ac of 20 kV. In all measurements, we checked that no spontaneous discharge occurred in the absence of a laser pulse. The current flowing through the plasma when triggered by the laser generated filaments was measured with a coaxial shunt (Fig. 1).

Experiments were also carried out with first electrode hole diameters of 4 and 3 mm with no significant change in the results. However, we could not reach the limit of a single filament because of alignment difficulties.

A typical result in the case of a 3 kV dc voltage is shown in Fig. 2(a) for an electrode separation of 4 mm. One notices a sudden drop (within the detection time resolution of

^{a)}Electronic mail: andre.mysyrowicz@ensta.fr

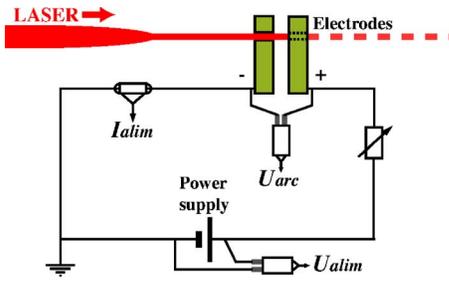


FIG. 1. (Color online) Experimental setup.

~ 2 ms) of the voltage across the electrodes while simultaneously the current reaches 250 A, the maximum value allowed by the power supply. The power dissipation in the plasma was around 8 kW, yielding an Ohmic resistance of less than $0.1 \Omega/\text{cm}$. This high conductivity is maintained for the duration of the applied voltage (1.2 s). If the voltage is applied for a longer duration, melting of the electrodes occurs. The melting is accompanied by a thermally driven displacement of the plasma to the top of the electrodes. In this case, the dissipation in the discharge increases significantly, as shown in Fig. 2(b). A triggering rate of 80% was obtained for several hundreds of attempts. In no case, a spontaneous discharge occurred in the absence of a laser shot.

Experiments were also carried out with ac voltage. Figure 3(a) shows the current flowing through the electrodes with a peak voltage of 20 kV at 50 Hz. After the onset of filamentation, the applied voltage drops to near zero and a 50 Hz alternative current flows between the electrodes. The high conducting discharge could be obtained over a distance of up to 6 cm, with a peak current again limited by the power supply. The average power dissipation in the ac mode was 8000 W for a current of 8.9 A rms, yielding an average resistance $R/l \sim 25 \Omega/\text{cm}$. Triggering of the discharge occurred preferentially when the negative voltage crest was synchronous with the laser pulse. Triggering on the positive crest was also observed, but with less statistical success. In some instances, we observed the discharge occurring at the peak of the negative crest while the laser was coincident with the positive crest [see Fig. 3(b)].

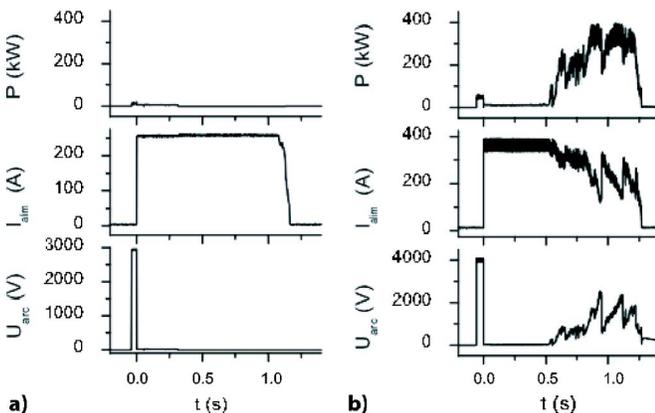


FIG. 2. (Color online) (a) Evolution of the voltage (U_{arc}), current flowing (I_{alim}), and dissipated power (P) between the two electrodes. The voltage is applied during 1.5 s and the laser pulse arrived at $t=0$ s. The current discharge is triggered by the laser filaments. (b) Evolution of the voltage (U_{arc}), current flowing (I_{alim}), and dissipated power (P) between the electrodes when the guided discharge transforms into an arc (at $t=0.5$ s).

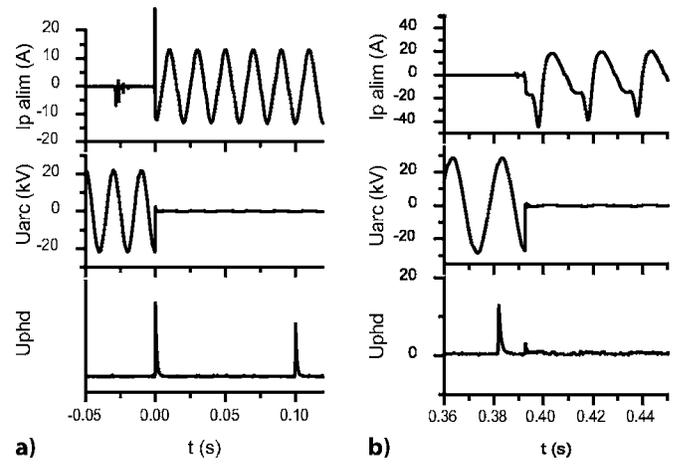


FIG. 3. (Color online) (a) Evolution of the ac voltage across the electrodes (U_{arc}) and current flowing between the electrodes ($I_{p \text{ alim}}$). At the bottom the photodiode signal (U_{phd}) also gives the arrival time of the laser pulse on the electrode. Here $t=0$ s correspond to the formation of the trigger laser filament. (b) Same experiment but with a delay between the laser pulse and the discharge initiation.

To discuss the results we first note that the applied voltage obviously converts the initial cold, low-density plasma into a high conducting, high temperature, and long-lived plasma column. One can estimate the final plasma temperature by noting that in order to account for the measured plasma resistance, one must assume that all molecules in air become singly ionized. In this case, the plasma conductivity σ ($\Omega^{-1} \text{cm}^{-1}$) can be expressed with the Spitzer formula,⁸

$$\sigma = \frac{l}{RS} = \frac{n_e e^2}{m_e v_{ei}} = 1.53 \times 10^{-4} \frac{T_e^{3/2}}{Z \ln \Lambda},$$

where n_e is the electron density, v_{ei} the electron-ion collision frequency, T_e is the electronic temperature (in K), and $\ln \Lambda$ is the Coulomb logarithm,

$$\ln \Lambda = 23 - \ln \left(\frac{Z \sqrt{n_e}}{(T_e)^{3/2}} \right).$$

For $n_e = 10^{19} \text{cm}^{-3}$, $Z=1$, $S=2 \text{cm}^2$, and $R/l = 0.17 \Omega \text{cm}^{-1}$, we obtain a temperature $T_e = 3.5 \times 10^4 \text{K} \sim 3 \text{eV}$.

Concerning the kinetics of plasma evolution, from a low-density initial plasma ($n_e \sim 10^{16} - 10^{17} \text{cm}^{-3}$) to a fully ionized plasma, we note that in some instances the discharge was observed with a significant delay $dt \approx 10 \text{ms}$ [see Fig. 3(b)]. We therefore tentatively attribute the initiation of the discharge to the same mechanism, as discussed in Ref. 3, namely, a thermally induced effect.

In conclusion, the plasma generated by femtosecond laser filaments has a low Ohmic resistivity, and it is able to carry a large current, either dc or ac over a long time >1 s. These features are promising for applications such as the contactless capture of current.

The authors are grateful to M. Pellet from DGA and to Steffan Hüller for fruitful discussions.

¹A. Couairon and A. Mysyrowicz, Phys. Rep. 441, 47 (2007).

²S. Tzortzakis, M. Franco, Y.-B. André, A. Chiron, B. Lamouroux, B. Prade, and A. Mysyrowicz, Phys. Rev. E 60, R3505 (1999).

- ³S. Tzortzakis, B. Prade, M. Franco, A. Mysyrowicz, S. Hüller, and P. Mora, *Phys. Rev. E* **64**, 057401 (2001).
- ⁴M. Rodriguez, R. Sauerbrey, H. Wille, L. Wöste, T. Fujii, Y.-B. André, A. Mysyrowicz, J. Kasparian, E. Salmon, J. Yu, and J.-P. Wolf, *Opt. Lett.* **27**, 772 (2002).
- ⁵R. Ackermann, G. Méchain, G. Méjean, R. Bourayrou, M. Rodriguez, K. Stelmaszczyk, J. Kasparian, J. Yu, E. Salmon, S. Tzortzakis, Y.-B. André, J.-F. Bourrillon, L. Tamin, J.-P. Cascelli, C. Campo, C. Davoise, A. Mysyrowicz, R. Sauerbrey, L. Wöste, and J.-P. Wolf, *Appl. Phys. B: Lasers Opt.* **82**, 561 (2006).
- ⁶R. Ackermann, K. Stelmaszczyk, P. Rohwetter, G. Mejean, E. Salmon, J. Yu, G. Mechain, J. Kasparian, V. Bergmann, S. Schaper, B. Weise, T. Kumm, K. Rethmeier, W. Kalkner, J.-P. Wolf, and L. Wöste, *Appl. Phys. Lett.* **85**, 23 (2004).
- ⁷H. Wille, M. Rodriguez, J. Kasparian, D. Mondelain, J. Yu, A. Mysyrowicz, R. Sauerbrey, J. P. Wolf, and L. Wöste, *Eur. Phys. J.: Appl. Phys.* **20**, 183 (2002).
- ⁸L. Spitzer, *Physics of Fully Ionized Gases* (Interscience, New York, 1955), 91.