

Light filaments generated by terawatt-laser pulses - conductivity, spectral content and LIDAR measurements

S. Niedermeier¹, M. Franco⁴, J. Kasparian¹, D. Mondelain³, A. Mysyrowicz⁴, B. Prade⁴, P. Rairoux, M. Rodriguez², F. Ronneberger, R. Sauerbrey¹, H. Schillinger, S. Tzortzakis⁴, H. Wille², J.-P. Wolf³, L. Wöste², J. Yu³

“Teramobile”, Joint CNRS/DFG Project, Berlin, Jena, Lyon, Palaiseau

¹*Institut für Optik und Quantenelektronik, Max-Wien-Platz 1, 07743 Jena, Germany
Tel. (49) 3641 947217, fax (49) 3641 947202, e-mail: niedermeier@qe.physik.uni-jena.de*

²*Freie Universität Berlin, Institut für Experimentalphysik, Arnimallee 14, D-14195 Berlin, Germany
e-mail: hwille@physik.fu-berlin.de*

³*Université Claude Bernard Lyon 1, Laboratoire de spectrométrie ionique et moléculaire, UMR CNRS 5579, F-69622 Villeurbanne Cedex, Lyon, France, e-mail: wolf@hplasm2.univ-lyon1.fr*

⁴*Laboratoire d'Optique Appliquée, ENSTA - Ecole Polytechnique, Centre de l'Yvette, 91761 Palaiseau Cedex, France
e-mail: mysy@ensta.ensta.fr*

Abstract: TW-fs-laser pulses are used for a novel height-resolved LIDAR detection technique. This remote sensing technique should allow a multi-component analysis of atmospheric compounds in the visible and near-infrared. Results of the spectral content and conductivity of light-filaments generated by high-intensity lasers and height-resolved LIDAR-measurements in the visible are presented.

OCIS codes: (280.0280) Remote Sensing, (190.0190) Nonlinear Optics, (190.5530) pulse propagation, (190.7110) Ultrafast Nonlinear Optics, (280.3640) Lidar

1. Introduction

When intense TW-fs-laser pulses propagate through the atmosphere, nonlinear effects like self-phase modulation (SPM), self-focusing (SF) or degenerated four-wave mixing (DFWM) cause an immense change of the temporal and spatial profile. The frequency content is changed, too. Depending on the initial beam profile, the pulse duration and other parameters like temporal chirp, one or several filaments are formed. These filaments can be quite stable and propagate for more than 20 meters [1,2]. It is our aim to use these filaments as a remote sensing technique (novel LIDAR detection technique), allowing a height-resolved multi-component analysis of the atmosphere.

We report on our preliminary experiments, not only the investigation of the conductivity and the spectral content of the filaments, but also on our first fs-LIDAR measurements in the visible and infrared. [3,4].

2. Methods and results

Freely propagating laser pulses start to produce a white light continuum in air (fig. 1) that can be used for a new and convenient LIDAR (Light Detection and Ranging) application. Using TW-Ti-Sapphire laser systems we measured the spectral content of the filaments from 300 nm up to 4.5 μm . Combining the advantages of both conventional LIDAR and long path absorption techniques, this application has the potential to detect simultaneously different species of air constituents and to give complete information (like temperature, water content or pollutants) in freely chosen air columns. If the whole unit of laser and detection apparatus can be made mobile (Teramobile project), it represents a very powerful tool as a fast scanning atmospheric detection system. In figure 2, an atmospheric profile is depicted, revealing e.g. clouds. Since the detected signal was due to the white light content of the laser beam only, it demonstrates the potential to reach heights up to 13 km with a white light continuum. Carrying out height- and frequency resolved measurements in the visible absorption lines of water and oxygen were found. Figure 3 shows the absorption lines of oxygen, demonstrating the usefulness of the system for atmospheric investigations.

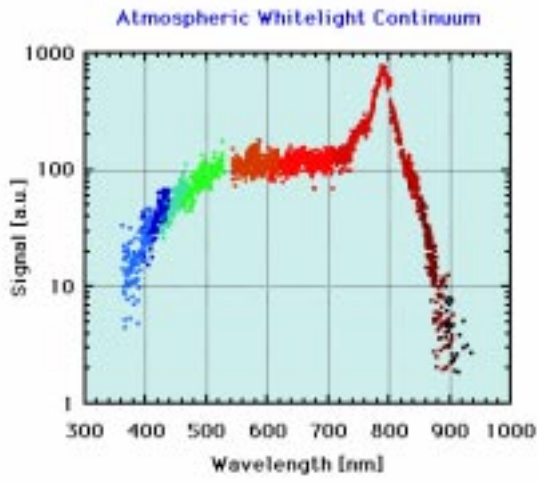


Fig. 1: White light continuum generated by a TW-laser pulse propagating through the atmosphere, the spectral clipping in the IR is due to decreasing detector efficiency.

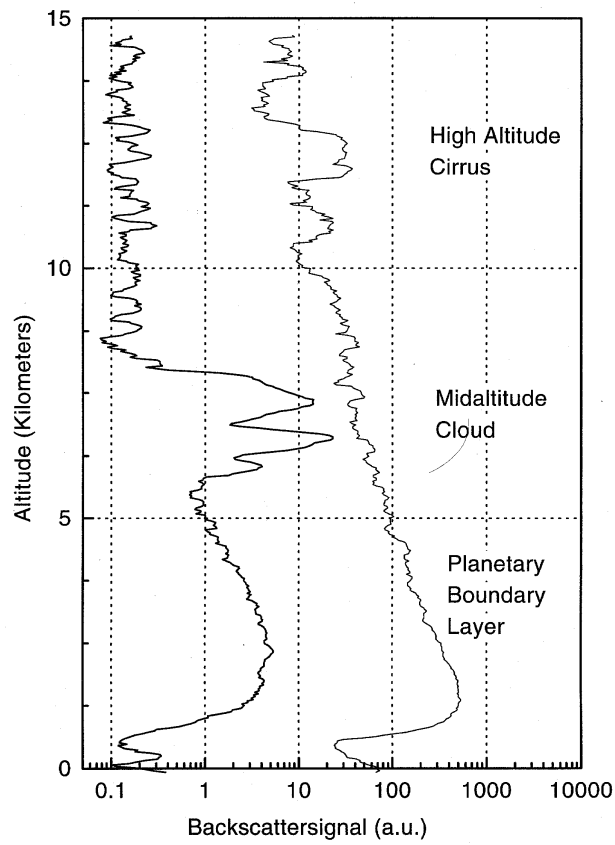


Fig. 2: Two different profiles of the atmosphere up to 15 km (with and without midaltitude cloud), as seen by Terawatt-LIDAR

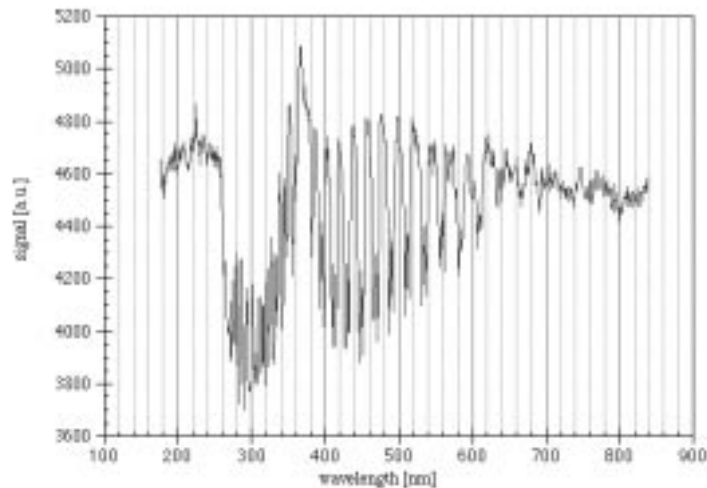


Fig. 3: Absorption lines of O₂ detected by Terawatt-LIDAR

When the laser beam is slightly focused, there is a certain threshold for the generation of light channels. These channels display beautiful colors (see figure 4), but they also could have technological functions in lightning prevention. In order to realize the idea of using such channels as lightning rods, it is very important to know their electron density. We examined the conductivity of these channels and found a lower limit for the electron density of $6 \cdot 10^{11} \text{cm}^{-3}$, sufficient for the initiation of atmospheric discharges.

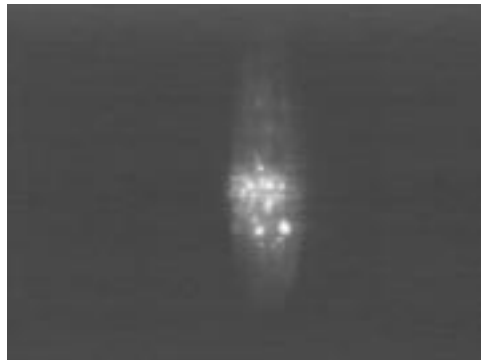


Fig. 4: Colored channels produced by a TW-laser

- [1] A. Braun, G. Korn, X. Liu, D. Du, J. Squier, G. Mourou, *Opt. Lett.* **20**, 73 (1995)
- [2] F.T.J. Nibbering, P.F. Curley, G. Grillon, B.S. Prade, M.A. Franco, F.Salin, and A. Mysyrowicz, *Opt. Lett.* **21**, 62 (1996)
- [3] L. Wöste, C. Wedekind, H. Wille, P. Rairoux, B. Stein, S. Nikolov, Ch. Werner, St. Niedermeier, F. Ronneberger, H. Schillinger, and R. Sauerbrey, *Laser und Optoelektronik* **29** (5), 51-53 (1997)
- [4] H. Schillinger and R. Sauerbrey, *Appl. Phys. B*, 753-756 (1999)